



BERBEQUIM ANGULAR COMPO 1500 RPM REVER. BUCHA 10MM
REF.: 9235



Manual do utilizador e instruções

Informações gerais

Nome:	
Morada:	

Modelo:	
---------	--



**DECLARATION
OF CONFORMITY**



We:

KROFTTOOLS
Parque Industrial da Pousa
Rua da Devesa, n.º 8
4755-307 Martim,
Barcelos

Declare under our sole responsibility that the product:

Part Number: 9235

Description: ANGLE GRIP DRILL 10MM 1500RPM

Serial No:-

To which this declaration relates is in conformity with the following directive (s):

Machinery Directive: 2006/42/EC

EN ISO 12100:2010 / Safety of machinery — General principles for design —
Risk assessment and risk reduction (ISO 12100:2010)

EN ISO 11148-3:2012 / Hand-held non-electric power tools - Safety
requirements - Part 3: Drills and tappers (ISO 11148-3:2012)

EN ISO 28927-5:2009/A1:2015 / Hand-held portable power tools - Test
methods for evaluation of vibration emission - Part 5: Drills and impact drills
(ISO 28927-5:2009)

EN ISO 15744:2008 / Hand-held non-electric power tools - Noise
measurement code - Engineering method (grade 2) (ISO 15744:2002)

IssueDate: 03/03/2025

José Bárbara
CEO

Características:

Carcaça em composite

Velocidade: 1500rpm

Entrada de ar: 1/4"

Capacidade porta broca: 10mm

Diâmetro mangueira de ar: 3/8" (10mm)

Saída de ar: traseira

Entrada de ar: 1/4"

(pressão de ar recomendada 90psi (6.2bar))

Consumo de ar: 4CFM (113L/min)

Comprimento: 200mm


Peso: 1.1kg

Pressão Sonora: 85,2dB(A)

Potência Sonora: 96,2dB(A)

**Instruções de operação:**

- Utilize acessórios recomendados pela KROFTOOLS
- Verifique o sentido de rotação (se disponível) antes de utilizar o artigo

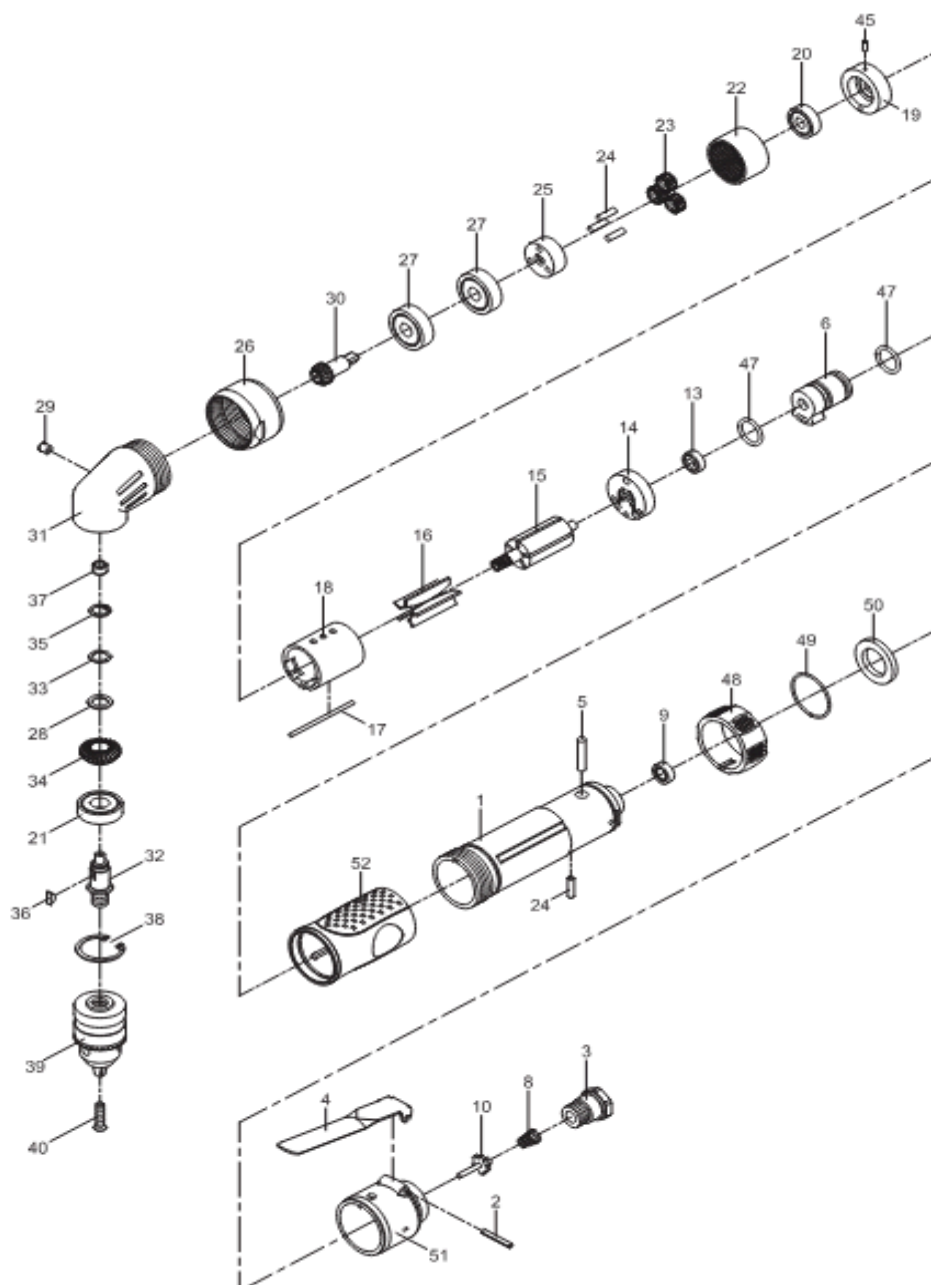

Peça	Descrição	Peça	Descrição
1	Carcaça motor	27	Rolamento (6200z)
2	Pino mola (3x22)	28	Anilha
3	Entrada de ar	29	Bujão óleo (3/16")
4	Alavanca aceleração	30	Engrenagem cilíndrica
5	Pino	31	Carcaça angular
6	Válvula reversão	32	Fuso
8	Mola	33	Anilha ondulada (WW-10)
9	Espaçador borracha	34	Engrenagem
10	Haste válvula	35	Anel retenção (ISTW-10)
13	Rolamento (696zz)	36	Chave (3x8)
14	Placa traseira	37	Casquilho
15	Rotor	38	Anel retenção (RTW-28)
16	Palhetas Rotor (5)	39	Bucha (com chave aperto) (3/8")
17	Pino (2.5x55)	40	Parafuso (L M5x25)
18	Cilindro	45	Pino mola (2x5)
19	Placa frontal	47	Junta tórica (2) (15.8x2.4)
20	Rolamento (608zz)	48	Botão válvula de inversão
21	Rolamento (6001zz)	49	Junta tórica (31x1.5)
22	Engrenagem interna	50	Material silenciador
23	Engrenagens (3)	51	Tampa traseira
24	Pinos (4) (4x13.8)	52	Pega borracha
25	Redutor fuso		
26	Porca bloqueio		